



Diesel motor pump towable

EIP-120-10

Towable diesel pump unit for waste water. Automatic priming system, 19mm solid passage

HMT	Flow Motor pump	Liquid	Yield	Fuel tank
100 m	120 m ³ /h	Wast water	68.72 %	450Lt

Pump Assembly

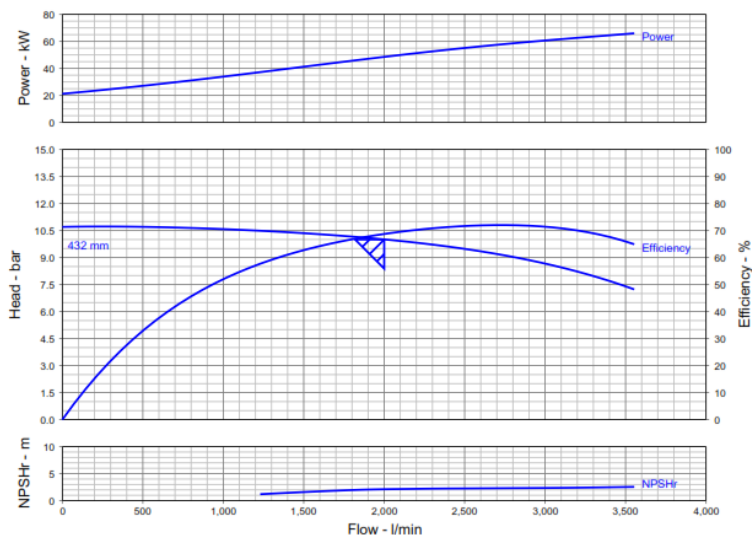

Characteristics

Pump	Pioneer PP63C17
Type	Centrifuge
Body	Cast Iron
Flow	120 m ³ /h
Pressure	100m
Speed	1800 1/min
Shaft power P2	68.72 kW
Yield	74.2 %
Flange	SAE 3
Body	Cast Iron
Impeller	17" Cast Iron
T° Max water	90°C

Engine	Deutz FL6L912
Type	4 temps
Fuel	Diesel
Speed	2500 rpm
Power	82 kW
Weight	410 kg
Cooling	Liquid
Lenght	996 mm
Width	679 mm
Height	806 mm



Groupe motopompe diesel

EIP-120-10

Groupe motopompe diesel tractable pour eaux chargées . Système d'amorçage automatique , passage de solide de 19mm

HMT	Débit Motopompe	Fluides	Rendement	Réservoir
100 m	120 m3/h	Eau chargée	68.72 %	450Lt

Montage pompe

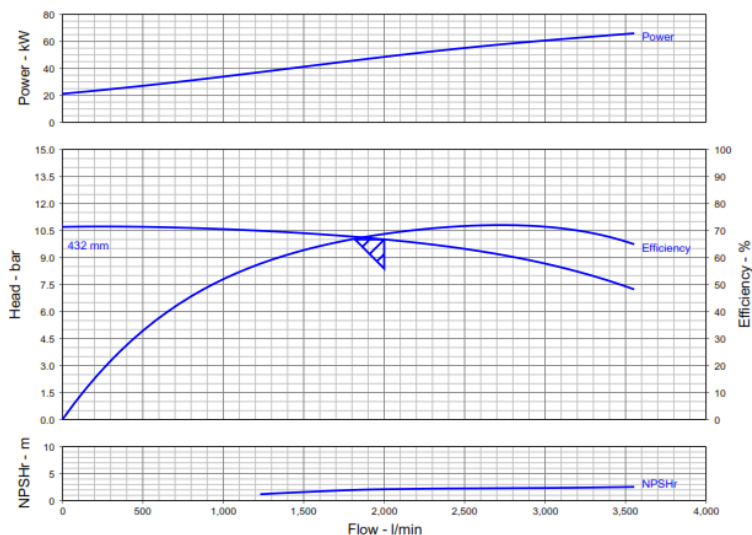

Caractéristiques

Pompe	Pioneer PP63C17
Type	Centrifuge
Corps de pompe	Fonte
Débit	120 m3/h
HMT	100m
Vitesse roue	1800 1/min
Puise à l'arbre P2	68.72 kW
Rendement	74.2 %
Bride	SAE 3
Diffuseur	Fonte
Roue	17" Fonte
Température maxi de l'eau	90°C

Moteur	Deutz FL6L912
Type	4 temps
Carburant	Diesel
Vitesse	2500 rpm
Puissance	82 kW
Poids	410 kg
Refroidissement	Par liquide
Longueur	996 mm
Largeur	679 mm
Hauteur	806 mm