


Groupe motopompe fixe pour irrigation


EIP-80-5

HMT	Débit Motopompe
50m	80m ³ /h

Montage pompe :



+



Caractéristiques

Moteur Perkins	404D-22
Carburant	Diesel
Réservoir	340 L
Autonomie	35h
Puissance	36kW @2200 rpm
Emissions	EU Stage IIIA

Pompe ROVATTI	FS43P105G
Type	Centrifuge
Corps de pompe	Fonte
Roue	Fonte
Arbre	Fonte sphéroïdale
Vitesse	2300 rpm
Puissance	17.62kW
Rendement	61.8%
Débit max	120 m³/h

Options incluses	
Amorçage	Pompe à main
Châssis	Passage pour fourches
Protection	Toit en acier galvanisé
Panneau de commande	ELCOS CIM250

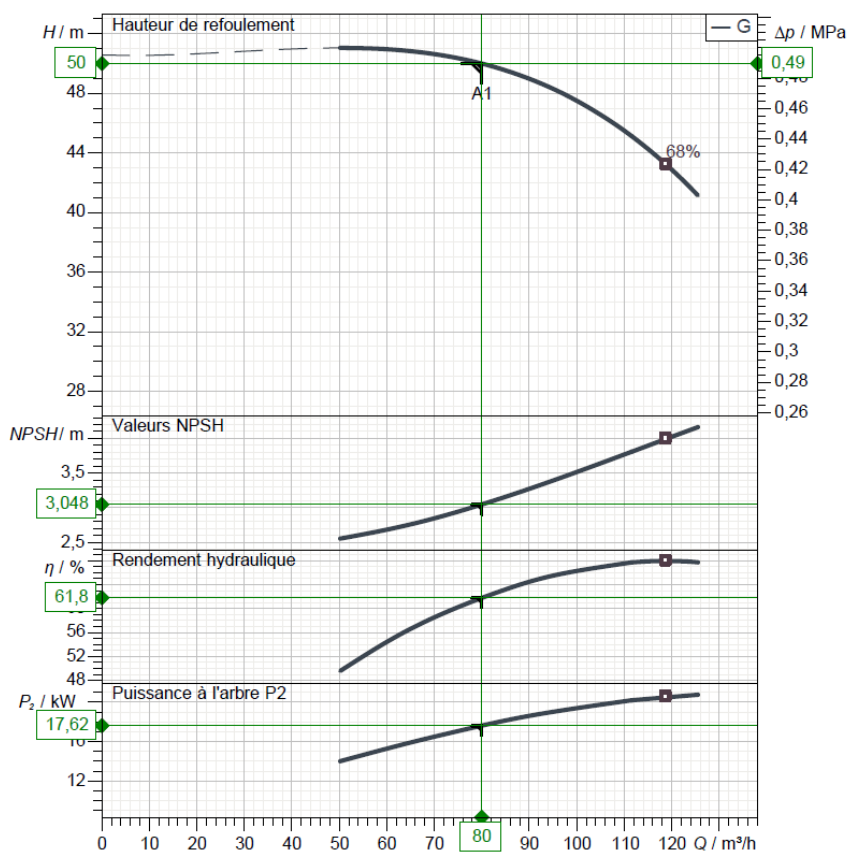


Photo non contractuelle

Fixed pump unit for irrigation

EIP-80-5

HMT	Flow
50m	80m ³ /h

Configuration




Characteristics

Perkins engine	404D-22
Fuel type	Gazole
Fuel tank	340 L
Autonomy	35h
Power	36kW @2200 rpm
Emissions	EU Stage IIIA

Pump ROVATTI	FS43P105G
Type	Centrifugal
Pump body	Cast iron
Impeller	Cast iron
Shaft	Spheroidal cast iron
Speed	2300 rpm
Power	17.62kW
Efficiency	61.8%
Max flow	120 m ³ /h

Options	
Priming	Manual pump
Skid	Fork lift
Protection	Galvanized steel roof
Control panel	ELCOS CIM250

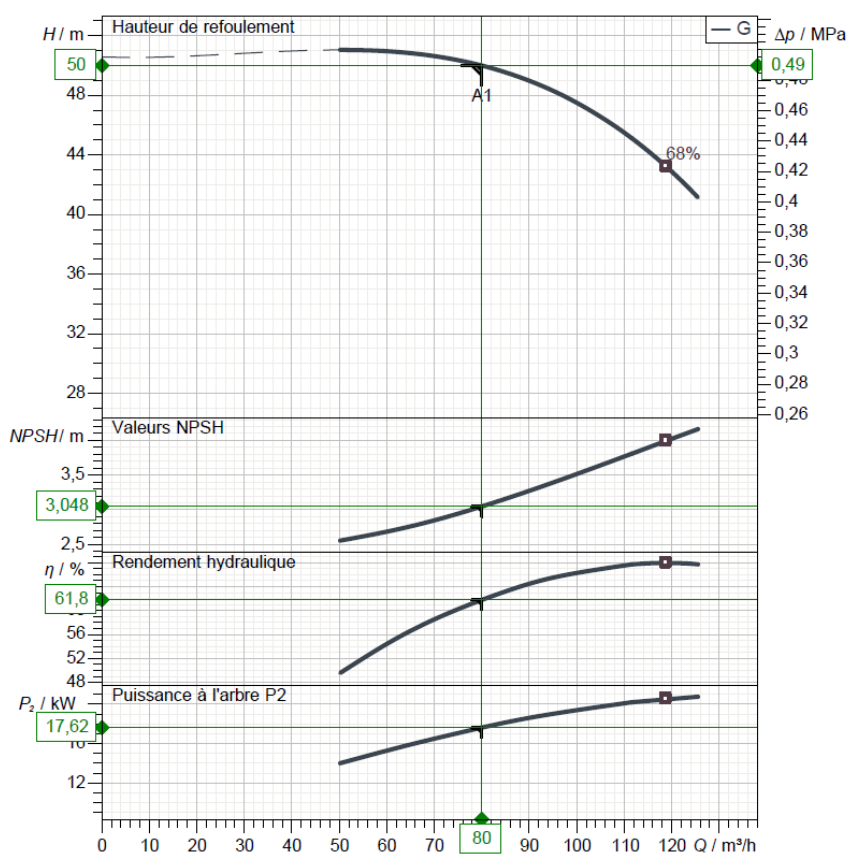

Non contractual photo