



Diesel motor pump towable

EIP-60-10

Towable diesel pump unit for clear water. Automatic priming system

HMT	Flow Motor pump	Liquid	Yield	Fuel tank
100 m	60 m ³ /h	Clear Water	74,15%	450Lt

Pump Assembly

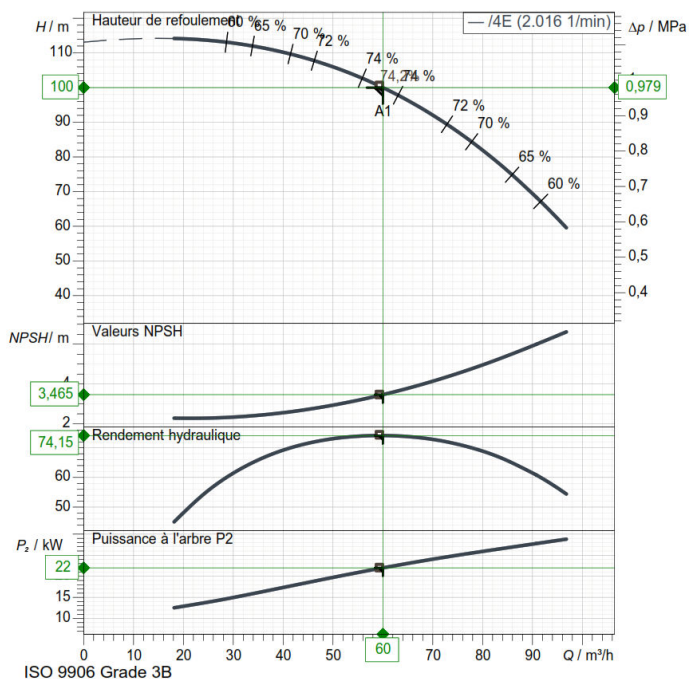

Characteristics

Pump	Rovatti F43K80/4E
Type	Centrifuge
Body	Cast Iron
Flow	60 m ³ /h
Pressure	100m
Speed	2000 1/min
Shaft power P2	22 kW
Yield	74.15 %
Flange	SAE 4
Body	Cast Iron
Impeller	8" Cast Iron
T° Max water	90°C

Engine	Perkins 404D-22T
Type	4 temps
Fuel	Diesel
Max speed	2500 rpm
Power	44 kW
Weight	194 kg
Cooling	Liquid
Lenght	662 mm
Width	489 mm
Height	698 mm



Groupe motopompe diesel

EIP-60-10

Groupe motopompe diesel tractable pour eaux claires . Système d'amorçage automatique

HMT	Débit Motopompe	Fluides	Rendement	Réservoir
100 m	60 m ³ /h	Eau claire	74.15%	450Lt

Montage pompe

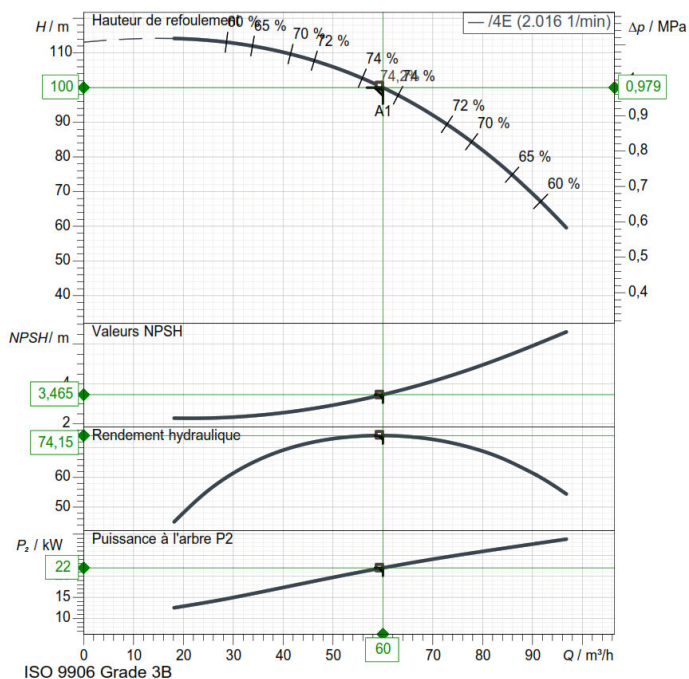

Caractéristiques

Pompe	Rovatti F43K80/4E
Type	Centrifuge
Corps de pompe	Fonte
Débit	60 m ³ /h
HMT	100m
Vitesse roue	2000 1/min
Puise à l'arbre P2	22 kW
Rendement	74.15 %
Bride	SAE 4
Diffuseur	Fonte
Roue	8" Fonte
Température maxi de l'eau	90°C

Moteur	Perkins 404D-22T
Type	4 temps
Carburant	Diesel
Vitesse max	2500 rpm
Puissance	82 kW
Poids	194 kg
Refroidissement	Par liquide
Longueur	662 mm
Largeur	489 mm
Hauteur	698 mm